
由 Autodesk 教育版产品制作


PIN1~PIN3	150 ~500ohm
PIN2~PIN4	350 ~1100ohm

PIN	OUT
1	X-
2	Y-
3	X+
4	Y+


Front view

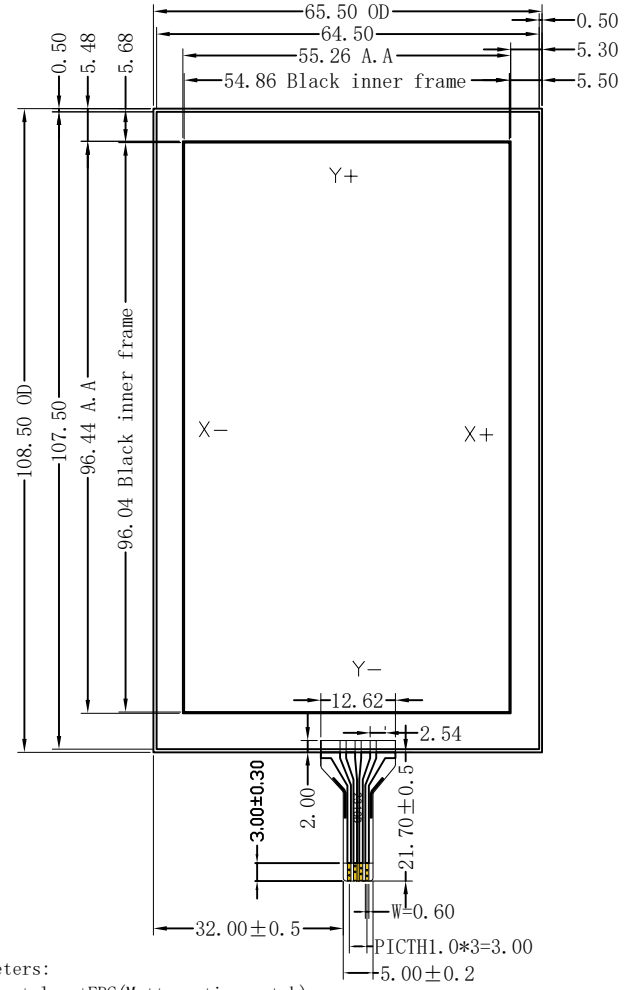

Side view

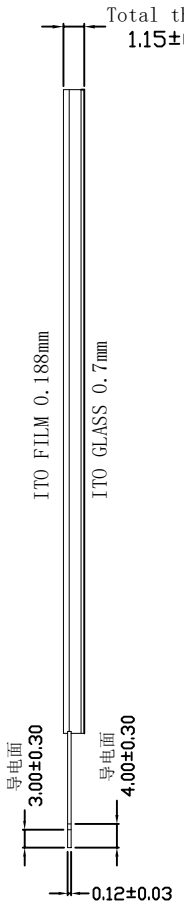


Back view

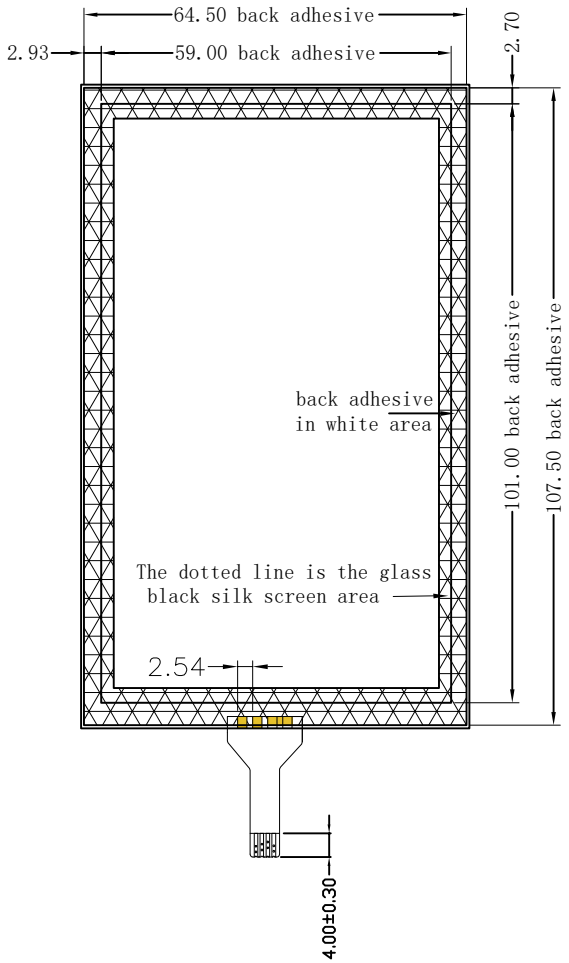

Technical parameters:

1. Structure: films+glass+FPC(Matte anti-scratch)
ITO Film typel: Anti-glare hard and anti-newton ring coating
2. Total thickness:1.15±0.15mm
2. Circuit level: DC5V 1mA
3. Insulation resistance: ≥20MΩ(25V DC)
4. Linear: ≤1.5%
5. Transparent rate: ≥78%
6. Operating pressure: 50-120g
7. Operational life spa: ≥1,000,000 times
8. Life span with pen operation: 100,000 times
9. Operating temperature: -20℃~+70℃
10. Storage temperature: -30℃~+80℃
11. X:200-900Ω Y:200-900Ω.
12. Unmarked tolerance: ±0.2mm
13. Meet ROHS environmental requirements



SCALE: 1 : 1 NOT TO SCALE		
PAGE: 1 OF 2		
GENERAL TOL. 0.20mm	UNITS MM	
APPROVALS	DATE	
APP Mychan	2017-03-26	
CHK Amorll	2017-03-26	
DWN Amorll	2017-03-26	

Reshine Display (HK) Technology Co.,Limited

Tel:0755-29190292 Fax:0755-29190291

MODEL NUMBER :

RXA-045009-01

PROJECTION

CUSTOMER P/N :

DATE:
2019-03-26

由 Autodesk 教育版产品制作