

由 Autodesk 教育版产品制作

REV.	DESCRIPTION	DATE
A/0	初始版本	2020-05-28

PIN	OUT
1	XL
2	YU
3	XR
4	YD

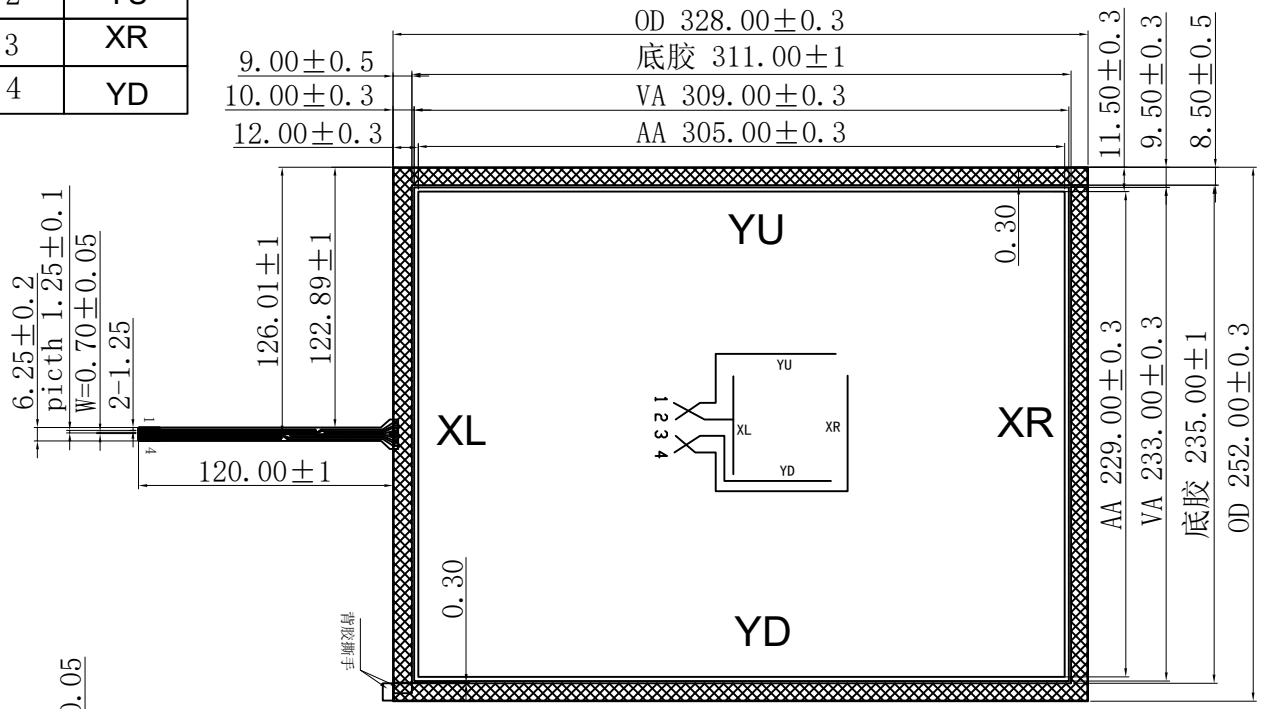

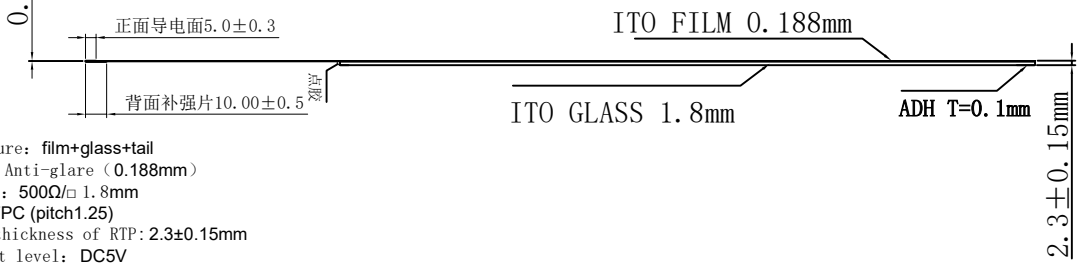

Notes:

1.Structure: film+glass+tail
film: Anti-glare (0.188mm)
glass: 500Ω/□ 1.8mm
tail: FPC (pitch1.25)
Total thickness of RTP: 2.3±0.15mm
2.Circuit level: DC5V
3.Insulation: ≥20MΩ(25V DC)
4.Operation Force: 50-150g
5.Hardness: ≥3H(pencil)
6.Linearity: ≤2.0%;
7.Transparency: ≥74%
8.Knock Test: ≥1,000,000 times; Write Test: ≥100,000 times .
9.Operating temp: -20℃~+70℃;Storage temp: -30℃~+80℃.
10.Response time: ≤10ms.
11. PIN1-3 X:300-1150Ω PIN2-4 Y:100--700Ω.
12.Unmarked tolerance ±0.3.

SCALE: 1 : 1 NOT TO SCALE		Reshine Display (HK) Technology Co., Limited
PAGE: 1 OF 1		
GENERAL TOL. 0.30mm	UNITS MM	Tel:0755-29190292 Fax:0755-29190291
APPROVALS	DATE	MODEL NUMBER : Product NO :
APP: MYchan	2020-05-28	RXA-150010-01 DATE: 2020-05-28
CHK: Amorll	2020-05-28	
DWN: Amorll	2020-05-28	

由 Autodesk 教育版产品制作